Methods for sealing cable trays in vertical shafts



Overview

Firestopping Requirements for Cable Trays and Sealing shall be tight and reliable, without visible cracks or voids. For large openings, install a fire-resi.


Key Takeaways

Cables in vertical shaft trays should be sealed using firestop packs, intumescent caulks, or watertight seals to ensure fire protection, water resistance, and mechanical stability.

Firestopping in Vertical Shafts

When cables pass through vertical shafts, walls, or slabs, all openings must be tightly sealed with firestopping materials to prevent fire and smoke spread. Common materials include fire-rated boards, firestop packs, firestop mastic, and fire-resistant mineral wool. For large openings, a fire-resistant backing plate should be installed before sealing.

Firestop packs should be placed in an orderly sequence, ensuring that gaps between packs and cables do not exceed 1 cm² and packing thickness is sufficient, typically not less than 24 cm. All gaps inside and around metal trunking must be sealed both internally and externally, and cover plates should be square, evenly painted, and properly fitted.

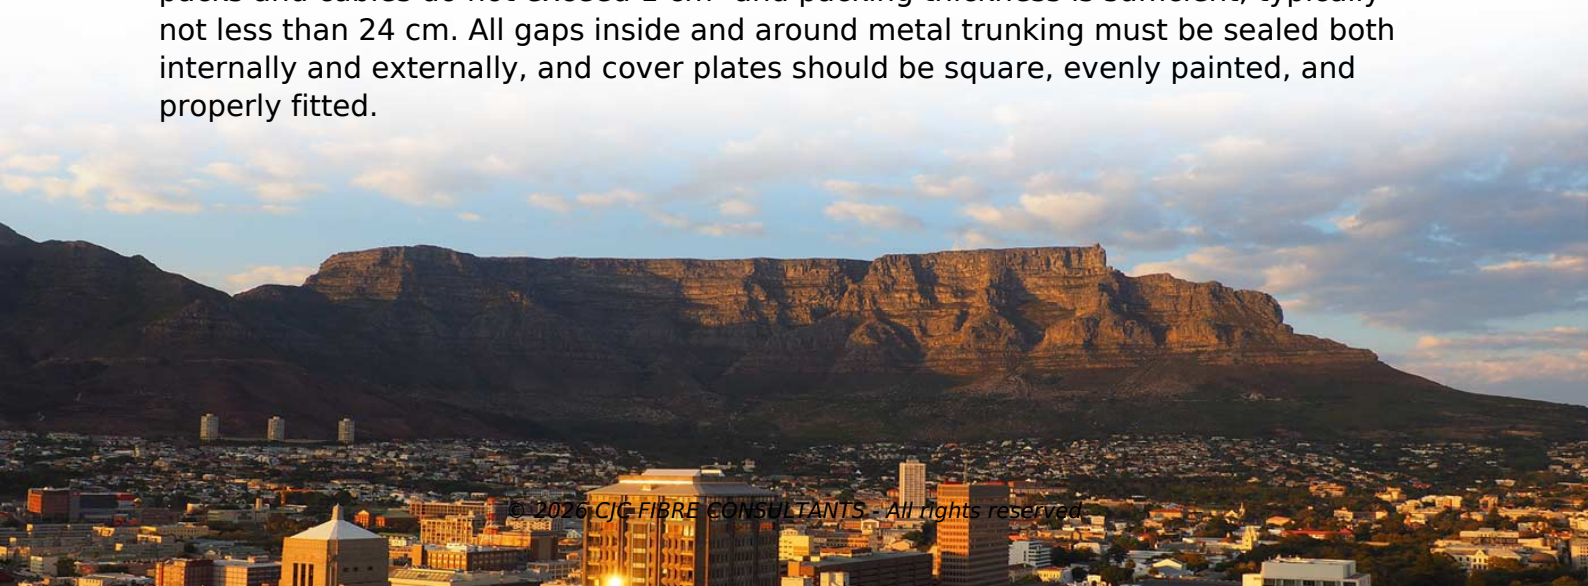

© 2026 CJC FIBRE CONSULTANTS - All rights reserved

Watertight Sealing

For vertical cable tray runs, especially in concrete pull boxes or outdoor/wet environments, watertight penetration is critical. Individual cable seals using pressure-fit seals are recommended for a truly watertight solution. Specialist products like Roxtec or Hawke transit systems can be used if installed correctly.

Alternatively, a dam can be built around the cable penetrations and filled with flowable silicone, such as Dow Corning 734, which fills all crevices and cures to form a watertight barrier.

Mechanical Fixation and Cable Management

Vertical cable installations must account for cable weight and tension. Use high-tensile steel wire armor, pulling grips, or socks to prevent cable rupture during installation. Fail-safe mechanisms should be in place to prevent free fall in case of a pulling wire failure.

Once installed, cables should be properly fixed with mounting brackets, clamps, or cleats that maintain constant lateral clamping force, avoiding slippage or mechanical deformation due to thermal expansion or load cycling.

Installation Sequence

Complete floor and wall finishes in the shaft and install shaft doors. Install cable trays and busways, ensuring proper alignment. Route cables carefully, considering weight and bend radius.

Apply grounding and waterproofing measures. Seal all penetrations with firestop packs, mastic, or watertight seals. Install cover plates or protective barriers to complete the seal.

Key Considerations

Ensure no closed loops of ferromagnetic steel in the shaft to avoid interference. Maintain minimum bend radius for cables exiting trays. Use UL-listed firestop systems and follow manufacturer instructions for compliance.

Plan installation carefully to allow for maintenance and future cable additions. By combining firestopping, watertight sealing, and mechanical fixation, vertical shaft cable trays can be safely and effectively sealed, ensuring compliance with safety standards and long-term reliability.

© 2026 CJC FIBRE CONSULTANTS - All rights reserved

Article Content

Firestopping Requirements for Cable Trays and

Sealing shall be tight and reliable, without visible cracks or voids. For large openings, install a fire-resistant backing plate before sealing. Layout and

Performance Evaluation of Cable Shaft Fireproof Sealing System in

The authors of this paper propose a comparative test method based on an entity test platform for a performance evaluation of cable shaft fireproof sealing systems in high-rise buildings.

Fire Stopping for Cables: Protecting Cable Trays & Electrical Shafts ...

How do we seal cable penetrations in fire-rated walls? Fire batts, fire pillows and shaft mortars explained.

Cable Tray Technical Guide A practical guide to product selection and ...

The choice of method should be discussed with a local inspector. The best decision may be to extend only the cables, creating a discontinuity in the cable tray.

Sealing of cable trays in vertical shafts

The authors of this paper propose a comparative test method based on an entity test platform for a performance evaluation of cable shaft fireproof sealing systems in high-rise buildings.

CSD Sealing Systems: Weatherstops

The frame can be opened and closed repeatedly to allow for cable maintenance and additions. The sponge rubber pads are compressed around the penetrating items and can be easily cut to fit around

Cable and pipe seals

More than a firestop the roxtec sealing system for cables and pipes protects against fire – but also against gas, water, and several other risk factors. our solutions are easy to use and help you ensure

Penetration Seals

The vast number of different building materials and different service and the types of penetrations that can be required, leads to a wide variety of different solutions for sealing around these services

Cable Tray Technical Guide A practical guide to product selection and ...

© 2026 CJC FIBRE CONSULTANTS - All rights reserved

A practical guide to product selection and installation This guide for engineers and installers has been developed by ABB as a practical reference regarding cable tray characteristics, installation, and

How to Install Cable Tray: A Comprehensive Guide to Different Cable ...

Welcome to our step-by-step guide on installing cable trays! In this video, we''ll explore the different types of cable trays available and provide detailed instructions for their installation.

Twelve high voltage cable construction techniques used

This technical article discusses twelve different methods for laying high voltage cables. Out of the ten, four are deemed conventional and

Cableizer

Installation considerations For cable pulling in vertical shafts, you have to consider the weight of the cable hanging in the shaft. You also have to

Best Practices for Installing Cables in Trays

Learn the best practices for installing cables in trays. This guide covers essential steps, technical requirements, and key details for efficient cable

Typical Design Philosophy of Cable Trays for Power Plant

Vertically running cable trays in cable riser/shaft shall be supported at an interval of 1000 mm. In case cables are to be laid over the top of switchgear panels, a clearance of 300 mm shall be maintained.

Effective weatherproofing for cable trays | Jones Weatherproofing

In vertical wall penetrations, weatherproofing cable trays is often carried out using a weatherstop sealing system. From the outside, this looks like ductwork or a series of boxes attached

GENERAL INFORMATION

Cable trays or raceways often provide a convenient, safe and efficient method of fiber optic cable installation. Trays can be installed in ceilings, below floors and in riser shafts. When installing fiber

Best Practice Guide to Cable Ladder and Cable Tray Systems

This guide covers cable ladder systems, cable tray systems, channel support systems and associated supports intended for the support and accommodation of cables and possibly other electrical

Installation of Cable Tray, Trunking And Accessories

© 2026 CJC FIBRE CONSULTANTS - All rights reserved

2. Purpose This method statement for the Installation of Cable Tray, Trunking, and Accessories shows and explains the procedure must be followed to install the cable tray and

Related Video Reference

This video was associated with the source search result. Verify technical details against current product documentation and project requirements.

Contact Us

Continue your research online:

Website: https://cjcconsultants.co.za
Technical inquiry: https://cjcconsultants.co.za/contact.html

This document is for preliminary research. Verify specifications against current standards, product documentation and project requirements.

© 2026 CJC FIBRE CONSULTANTS - All rights reserved